


AliDeck ULTRA BOARD



Specification Datasheet

A2-s1, d0
& A2fl-s1
FIRE
RATED

The **AliDeck Ultra board** has been specifically designed to be an ultra-wide system that is perfect for the new-build applications, it offers a 60mm wide fixing channel to allow for lifting eyes to for craning pre-fabricated balconies into position, and features a built-in Drainage Channel for effective water management.

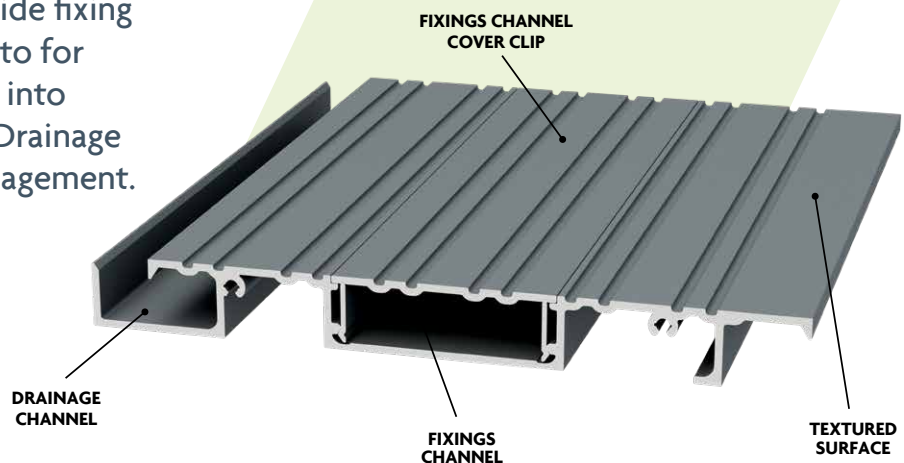

1 FIRE RESISTANCE

The boards are manufactured completely from aluminium and are therefore fire resistant and non-combustible to **A2-s1, d0** and **A2fl-s1**.

2 DRAINAGE

The Ultra Board has a built-in Drainage Channel within the board profile. This enables rainwater to be captured and diverted to gutters for effective disposal.

3 SLIP RESISTANCE

AliDeck uses a specially-formulated powder-coat finish to ensure excellent slip-resistance, achieving "Low Slip Potential" certification in independent testing.

4 INSTALLATION

Speed and ease of installation are key to any project, so we have designed a board that has a concealed fixings channel allowing for fixing through the board. In the Ultra Board, this channel is 60mm wide so lifting eyes can be fitted with all boards in-situ for craning balconies into place. The board can also be trimmed down the length to match any projection of balcony and still be structurally stable across the whole plank.

5 AESTHETICS

AliDeck operates its very own Qualicoat Standard **IN-HOUSE** seven-stage pre-treatment powder-coating facility using Class 2 powders for complete peace of mind.

All AliDeck Boards have been independently tested for Fire performance for flooring, walls, and ceilings to BS EN 13501 (BS EN 13823, and BS EN ISO 1716). Also tested for Slip-resistance to BS 7976 Part 2; Wear-resistance to SATRA TM391. Loading performance to BS 6180; Deflection performance to BS 8118, BS 6399, and BS 1991.

Product Specification

- Fire resistant: A2-s1, d0 and A2fl-s1
- Slip resistance in the dry – see table overleaf
- Slip resistant in the wet – see table overleaf
- The weight of the standard board including the clip in cover is 1.912 kg per linear M
- Coating thickness - 60-80 microns
- Impact test - with an energy of 2.5kJ to ensure that the coating adheres to the substrate to EN ISO 6272 / ASTM D2794
- Bend test - on 5mm mandrel to ensure adhesion after bending to EN ISO 1519
- Machu Test (accelerated corrosion test) - in a solution made up of sodium chloride acetic acid and hydrogen peroxide at 37 degrees °C Duration 48 hours Qualicoat
- 2.4.1. - cross hatch cuts are made at 2mm spacings with one being at 90 degrees to the other cut, tape is applied left for 2 minutes and removed to check for adhesion of paint (EN ISO 2409 2013)
- Qualicoat 2.18 - sawing and drilling test to ensure no flaking after cutting (using sharp tools)
- Acid salt spray test - ISO 9227
- EN ISO 3231 - Resistance to humid atmospheres containing Sulphur Dioxide
- EN ISO 11341 - Accelerated weathering test
- EN ISO 20810 - Natural weathering test (Florida Test) (Carried out on Powder Type)
- EN ISO 12206-1 - Resistance to mortar (Carried out on powder type)
- EN ISO 6270 – 2 - Constant climate condensation water test.
- Choice of colours - Available in a wide range of RAL colours.

Protective Finish

The planks are coloured using the seven-stage pre-treatment Qualicoat Standard. Qualicoat is a quality label organisation committed to maintaining and promoting the quality of coating on aluminium and its alloys for architectural applications.

Installation

The AliDeck aluminium decking boards are 50% quicker to install compared to other decking systems on the market. This is because you only need to install the AliDeck Joists or support system up to every 800mm on a 2.0kN point load to comply with BS 8579:2020, whereas traditional decking systems require joists every 400mm. Full installation videos and installation guides are available on www.alideck.co.uk.


Dimensions

INDIVIDUAL BOARDS:

Length: 4 & 6 metres

Width: 175mm

Depth: 20mm



The boards can be cut to size along both the length and width

Maximum Overall Decking Area: Unlimited
Allowable Span: 800mm on a 2kN point load

Construction

The boards are constructed completely from 100% aluminium (6063 T6 grade), up to 30% of which has been recycled to make these boards eco-friendly and much better for the environment.

Maintenance

AliDeck's aluminium decking, finished with a 7-stage Qualicoat system, requires minimal maintenance. A quick wipe with a damp lint-free cloth is enough. Our superior class 2 powder coating exceeds industry standards, ensuring lasting quality with less upkeep.

Colour Options

AliDeck Boards and Joists are available in our 10 standard colours. Please refer to our Standard Colour Range datasheet for colour options (available at www.alideck.co.uk/decking/boards/alideck-colours/).

Non-standard colours are available on request as special orders, but may affect cost and lead-time. The Boards and Joists can be supplied non-coated/mill finish to achieve A1 fire rating.



Warranty

The decking is supplied with a **30 year warranty** against splitting, cracking, warping, splintering, rotting, twisting and material or manufacturing defects. It has a minimum **60 year life** expectancy.



A2-s1, d0 & A2fl-s1
FIRE RATED



ALL
ALUMINIUM



HEAT
RESISTANT



DURABLE
TEXTURED FINISH



LOW
MAINTENANCE



RECYCLABLE



STABLE IN ALL
WEATHER
CONDITIONS

Europa & Jenner House
Victory Park
1-2 Trident Close
Medway City Estate
Rochester ME2 4ER

Tel: 01622 235 672
Email: info@alideck.co.uk
www.alideck.co.uk

 **ALIDECK**™
Aluminium Decking